


## PULLEY TAP DIMENSIONS • GROUND THREAD

(Ref. USCTI Table 310)

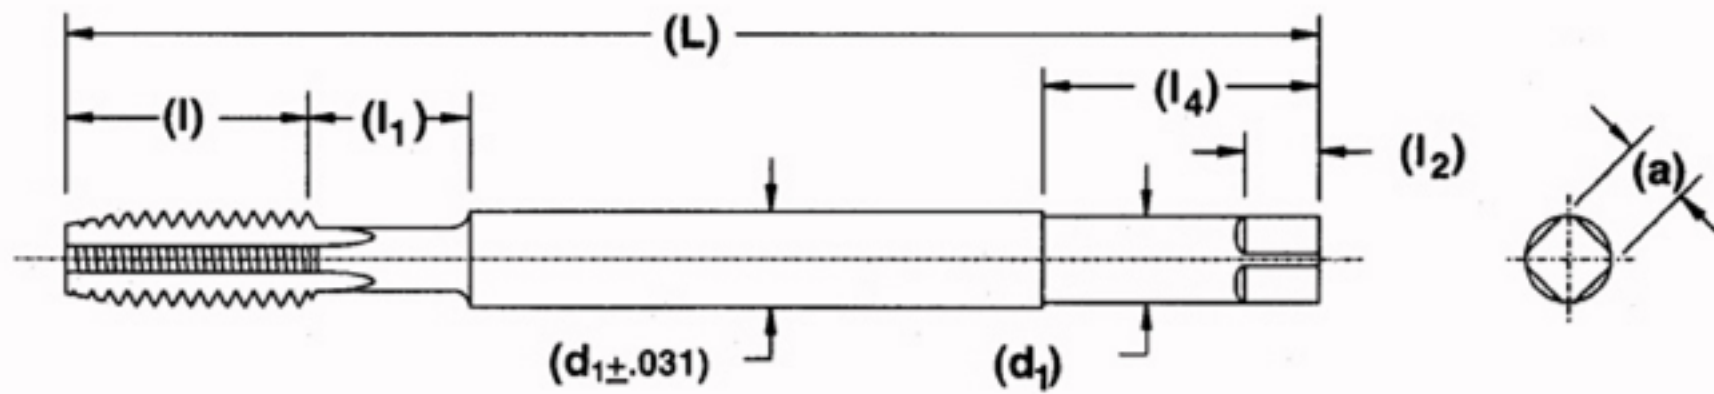

### General Dimensions

Nominal Fractional Diameter Inches	Tap Dimensions - Inches						
	Overall Length	Thread Length	Neck Length	Square Length	Length of Shank Close Tol. Section	Shank Diameter	Size of Square
	L	l	l <sub>1</sub>	l <sub>2</sub>	l <sub>4</sub>	d <sub>1</sub>	a
1/4	6,8	1.00	.38	.31	1.50	.2550	.191
5/16	6,8	1.13	.38	.38	1.56	.3180	.238
3/8	6,8,10	1.25	.38	.44	1.63	.3810	.286
7/16	6,8	1.44	.44	.50	1.69	.4440	.333
1/2	6,8,10,12	1.66	.50	.56	1.69	.5070	.380
5/8	6,8,10,12	1.81	.63	.69	2.00	.6330	.475
3/4	10,12	2.00	.75	.75	2.25	.7590	.569

### Tolerances

Element	Size Range	Direction	Tolerance
Overall Length - L	1/4 to 3/4 inc.	Plus or Minus	.063
Thread Length - l	1/4 to 3/4 inc.	Plus or Minus	.063
Neck Length - l <sub>1</sub>	1/4 to 3/4 inc.	See Note - 1	See Note - 1
Square Length - l <sub>2</sub>	1/4 to 3/4 inc.	Plus or Minus	.031
Length of Shank (close tol.) - l <sub>4</sub>	1/4 to 3/4 inc.	See Note - 2	See Note - 2
Shank Diameter - d <sub>1</sub>	1/4 to 3/4 inc.	Minus	.0050
Size of Square - a	1/4 to 1/2 inc.	Minus	.004
	5/8 to 3/4 inc.	Minus	.006

#### NOTES

- 1) l<sub>1</sub>, (Neck Length); neck and its length is optional with manufacturer.
- 2) l<sub>4</sub>, (Length of Close Tolerance Shank) is minimum length which is held to eccentricity tolerances per Table 317.

#### GENERAL NOTES

- a) These taps have an internal center in the thread end.
- b) These taps are made to the H3 limits shown in Table 327.
- c) For eccentricity tolerances of taps elements see Table 317.
- d) d<sub>1</sub>, (Shank Diameter) is approximately the same as the maximum major diameter for that size.
- e) a, (Size of Square) is equal to .75 X d<sub>1</sub> to the nearest .001 inch.